



## UCx - Creating a SIP Extension


1. From the **PBX** tab, select **PBX Configuration**
2. From the left side column, select **Extensions**
3. In the drop-down list box, select the device type **Generic SIP Device** and press the **Submit** button

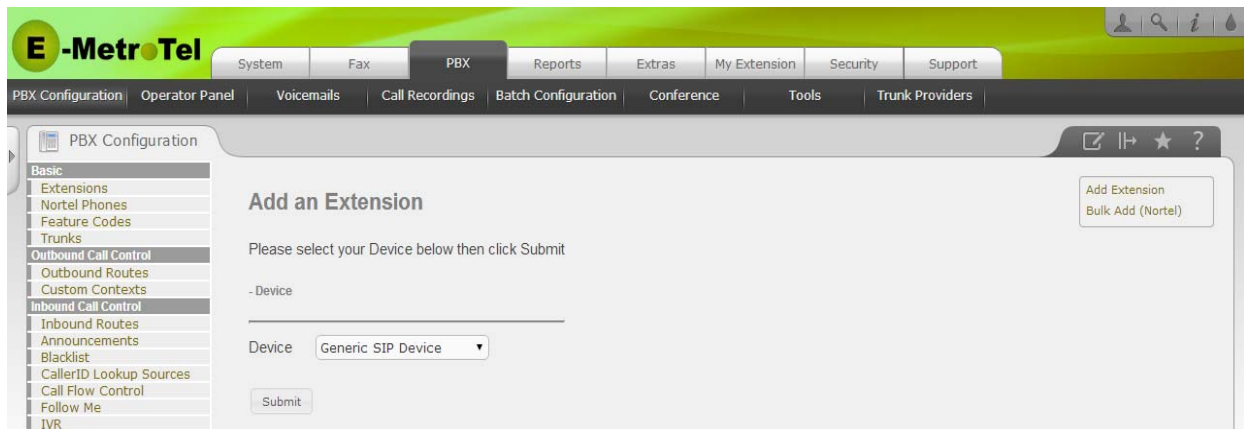

1. On the **Add SIP Extension** page, enter the extension number in the **User Extension** field
2. Fill in all extension specific parameters. You should configure at least the following fields:
  - **Display Name** (name of the extension/user)
  - **Secret** (password to be used for registration of the SIP phone)
3. Press the **Submit** button to create the SIP extension.

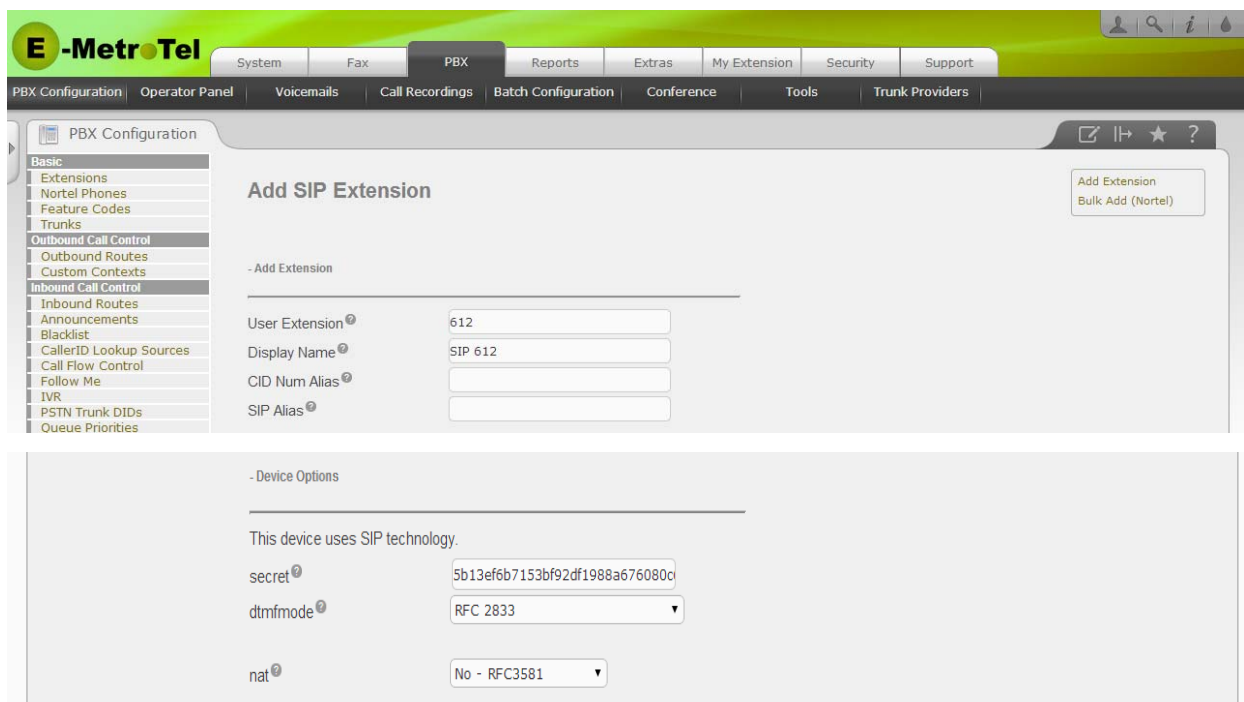

After you create the SIP extensions, apply configuration changes by clicking on the pink banner "Apply Config" at the top of the page.

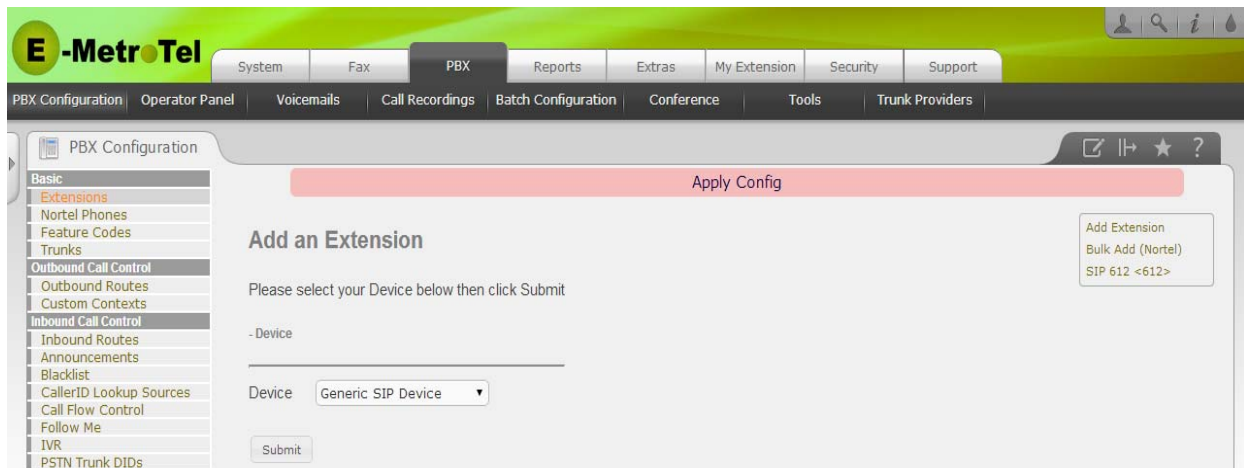

## Configure SIP Telephones or SIP Soft Clients

1. Install your SIP telephone or soft client as per user instructions.
2. Use the extension number, the secret (password) and the UC<sup>X</sup> system's IP address to configure the SIP device as per the instructions that came with the device.
3. Repeat these configuration steps for all other extensions.

## Making a Test Call

Dial from one extension to another, answer the call and verify that speech path is working in both directions.